
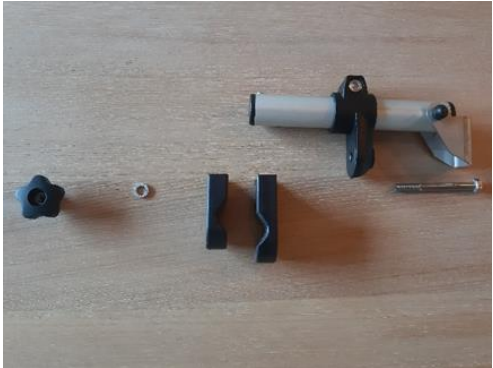
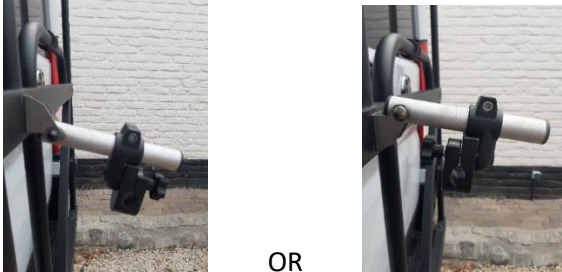



Van 'n Bike frame holder installation		Remark	Photo
A.	<p>Install the Van 'n Bike frame holder.</p> <p>Parts:</p> <ul style="list-style-type: none"> <li>• Frame holder with mounting bracket</li> <li>• M8 hexagon screw</li> <li>• 2 black grippers</li> <li>• 1 Nord Lock washer</li> <li>• 1 star knob</li> <li>• 1 black cover cap</li> </ul>	<p>The Van 'n Bike frame holder is an extra connection between the Van 'n Bike frame and your bike carrier rack.</p> 	
B.	<p>Insert the supplied bolt through the hole of the mounting bracket. Next, fasten this completely in the hole with thread in the centre of the top horizontal tube of the Van 'n Bike. Tighten it with a no. 13 spanner and position the black cover cap on the bolt's head.</p>	<p>When you tighten, you can choose to position the frame holder higher or lower by turning the mounting bracket half a turn.</p>  <p style="text-align: center;">OR</p>	
C.		<p>The position of the clamp with "grippers" can be changed by sliding it forwards or backwards over the tube of the frame holder.</p> <p>Use a no. 6 Allen key to loosen and tighten.</p> <p>The clamp with "grippers" can also be turned upwards.</p>	



You can also remove the clamp from the tube and turn it around with the star knob pointing to the inside.

You can therefore adjust the position of the clamp in various ways on the bike carrier that you are installing on the Van 'n Bike.

When the correct position has been determined, you can position the clamp with "grippers" around the bracket of the bike carrier and tighten it by using the star knob.

D.

**ATTENTION!!!!!!!!!!**

There are "Nord Lock" locking washers on the star knob. They must always be secured onto the star knob so that they cannot vibrate free when driving.

The Nord Lock locking washers consist of 2 disks that must be installed with the inside towards each other. You can see the inside of the washers on the photo below.



You can see the outside of the washers on the photo below.

